

## BiPAC 4700ZU

### 4G LTE VPN Outdoor Router

#### Broadband Access without Boundaries

The Billion BiPAC 4700ZU LTE VPN Outdoor Router supports the latest generation of LTE fixed wireless networks providing connectivity for homes, businesses, rural and underserved areas. The BiPAC 4700ZU integrates a high performance device with an embedded LTE module and advanced IP networking features enabling support of multiple high bandwidth applications.

Homes and businesses with a weak or nonexistent wireless signal can benefit from the extended range and reach of the BiPAC 4700ZU. Multiple MIMO antenna technology options allow service providers to select the optimal solution for their environment or application whether LOS (Line of Sight) or NLOS (Non-Line of Sight). Physical size and weight were key design considerations of the BiPAC 4700ZU. It can be mounted directly on exterior walls, chimneys, lightweight poles and used for retrofitting applications such as the replacement of older generation wireless technology.

The BiPAC 4700ZU is an industrial-grade outdoor fixed wireless router with an IP67 rated enclosure to withstand extreme weather conditions and harsh rugged deployments. In addition to outdoor, it can be installed in environments such as: manufacturing plants, industrial automation, stadiums, convention halls, stadium facilities, school campuses or virtually any venue requiring a robust wireless solution. Easy Installation is realized with integrated IEEE 802.3at Power over Ethernet (PoE) support, eliminating the need for separated power and data cables.

Easy Installation is realized with integrated IEEE 802.3at Power over Ethernet (PoE) support, eliminating the need for separate power and data cables.

#### High Performance and Fully Supports for Multiple LTE Frequency Bands

- High performance LTE module<sup>\*\*</sup>
- Advanced IP networking functionalities including bridge and router modes

#### Embedded High Performance Dual-Polarized MIMO Antenna for Maximum Bandwidth and Service Coverage

- Embedded dual-polarized antenna
- Optimize antenna design per band

#### Designed for Challenging/Rugged Deployments

- IP67 hardened enclosure with industrial-grade components
- Designed for the toughest industrial environments

#### Lightweight, Compact and Unobtrusive Design


- Easily installed by single person
- Supports Passive Power of Ethernet (PoE)

#### Secure VPN Connections

- IPSec, PPTP, L2TP, GRE, OpenVPN

#### Package Includes PoE Injector and Mounting Kit

## Application Diagram

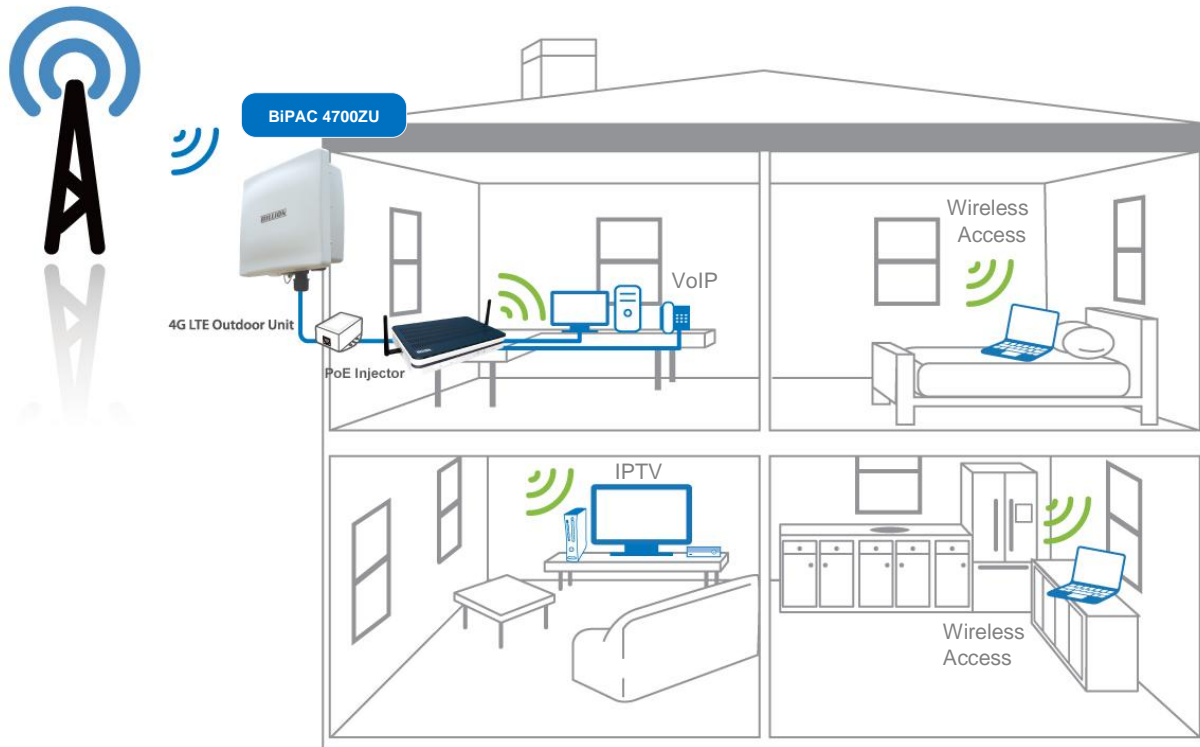

## Features & Specifications

### General Features

- **Embedded 4G LTE\***<sup>1</sup>
  - Embedded high performance LTE module
  - Supported frequency bands:
    - LTE-FDD: B1(2100MHz), B3(1800MHz), B5(850MHz), B7(2600MHz), B8(900MHz), B18(850MHz), B19(850MHz), B21(1500MHz), B28(700MHz)
    - LTE-TDD: B38(2600MHz), B39(1900MHz), B40(2300MHz), B41(2500MHz)
- Supported data rate:
  - LTE-FDD: Max 300Mbps/ 50Mbps (DL/ UL)
  - LTE-TDD: Max 222Mbps/ 26Mbps (DL/ UL)
- Downlink Carrier Aggregation
- Downlink MIMO support(2x2, 4x2)
- **LTE Antenna**
  - Embedded Dual-Polarized MIMO Antenna
  - Optimize antenna design per band
- **Operational Mode**
  - Bridge or Routed mode

### Features (Routed Mode)

- **Network Protocols and Features**
  - IPv4, IPv6, IPv4/ IPv6 dual stack <sup>\*2</sup>
  - Dual APN<sup>\*3</sup>
  - NAT, Static Routing and RIP-1/2
  - Virtual Server and DMZ
  - SNTP, DNS relay and DDNS
  - IGMP Snooping and IGMP Proxy
  - Supports DHCP server/client
- **Firewall**
  - Built-in NAT firewall
  - Stateful Packet Inspection (SPI)
  - Prevents DoS attacks including Land Attack, Ping of Death, etc.
  - Access Control
  - IP Filtering, MAC Filtering, URL Filtering
  - Password protection for system management
  - VPN pass-through
- **Secure VPN Connections**
  - IPSec
  - PPTP
  - L2TP
  - GRE
  - OpenVPN

### ■ Management

- Web-based GUI for remote and local management
- Firmware upgrade and configuration data upload and download via web-based GUI
- TR-069<sup>\*2</sup>, SNMP
- Syslog monitoring
- LTE usage allowance

### ■ Hardware Specifications Physical Interface

- Giga Ethernet LAN with IEEE 802.3at compliant PoE P.D
- SIM slot (for the SIM from Telco/ISP)
- LED Indicators: Power, LAN(PoE), LTE, and Internet

### Physical Specifications

- Dimensions: 8.5" (W) x 7.5" (H) x 3.0" (D)  
(257mm x 227 mm x 91mm)
- Weight: 1.81kg (4lbs)
- IP-67 grade enclosure

### Operating Requirements

- Operating temperature: -40°C to 60°C  
(-40°F to 140°F)

#### \* Notes:

1. The LTE is dependent on your local service provider.
2. Only upon request for Telco/ ISP tender projects.
3. Dual APN is not supported on some specific SKU, please confirm it with our sales.
4. Specifications in this datasheet are subject to change without prior notice.

Copyright © 2020 Billion Electric Co., Ltd. All rights reserved.

v.20200527-MC7430